

## / Description

Unwinder for pipes with max. 20 mm diameter and 600 mt. length. It can be supplied in a wooden case for housing and transportation.

## / Products

Code	Description
88P2050099	Without case
88P2050098	With case



## / Installation instruction


After taking the Hose scroller out of the box, check that it hasn't been damaged during transport.

1. Assemble the hose scroller, as the illustration below.
2. Put the spool on the hose scroller and insert the rod to press the spool (Rif.5).

## / Operation instrucion

- Capacity load Kg. 110.
- Verify that all handwheels are closed before use.
- To put the hose scroller on the polystyrene, remember to use the feet to avoid that the weight of hose scroller holes the polystyrene surface.
- Don't leave the hose scroller at the rain, it isn't weatherproof.
- Sometimes unscrew the screw M6 of bearing, with the key, disassembly the parts, clean, grease and assembly again the bearing.

## / Components

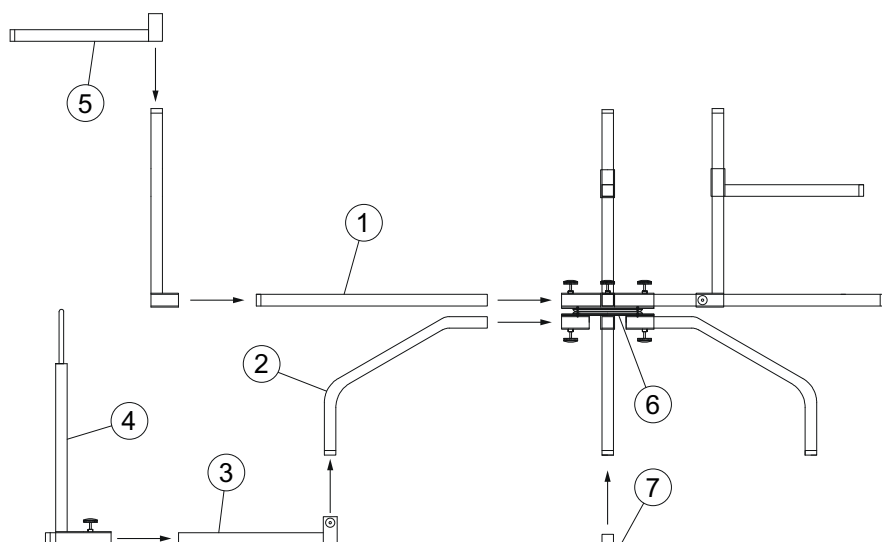

1. Rod for spool support L = 600 mm. (4 pieces).
2. Curve leg (4 pieces).
3. Inside rod for spool pipe L = 600 mm (5 pieces).
4. Pipe guiding eye (1 piece).
5. Rod to press spool L = 300 mm (1 piece).
6. Bearing (1 piece).
7. Hose scroller feet (4 pieces).