


### / Description

Battery powered, wall mounted digital daily chronothermostat, pin button programmable for heating or air conditioning.

### / Features

P410 is a daily chronotherostat with backlit iconographic display. Designed to combine the best personal comfort with energy savings. Suitable for any type of heating or air conditioning system.

P410 is the best solution for those who want an inexpensive tool, extremely simple to use, to programme intuitively for the comfort of your day, at home, at work, in the store and in any other environment.

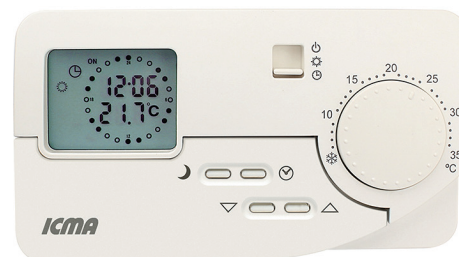

### / Fields of use

P410 is a wall-mounted chronothermostat. It can be fixed directly to the wall using the plugs and the screws or on the electrical system's junction boxes if already predisposed. The connection with only two wires allows it to be fitted in place of the simple room thermostat.

### / Warning

Like all heat regulators it must be installed far from the direct influence of heat sources or drafts.

### / Standards

CE compliant according to the following:

- EN 60730-1/2-9 class II
- LDV 2014/35/UE
- EMC 2014/30/UE
- RAEE2002/96/EC
- RoHS 2011/95/EC
- B.T. 73/23/CEE
- CEM 89/336


Produced according to process certification

- ISO 9001 V2008

### / Construction features

- Power supply: two AA LR6 1,5 V batteries
- battery life: at least 1 year
- backlit display
- adjustable temperature 5 ÷ 35 °C
- storage temperature -20 ÷ +70 °C
- anti-freeze function ≤ 6 °C
- relative humidity 10 ÷ 90% without condensation
- minimum programming interval 1 hour
- switching contacts (SPDT)
- contact rating: 8 (3) A/250 Vac
- measuring accuracy ± 0,1°C
- temperature resolution 0,1°C
- protection class IP 30 according to EN 60529
- battery charge status display
- weight 250 gr

### / Dimensions

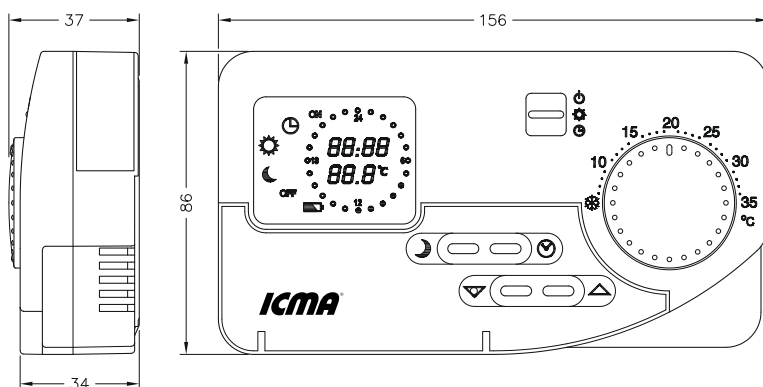

### / Wiring diagram

