
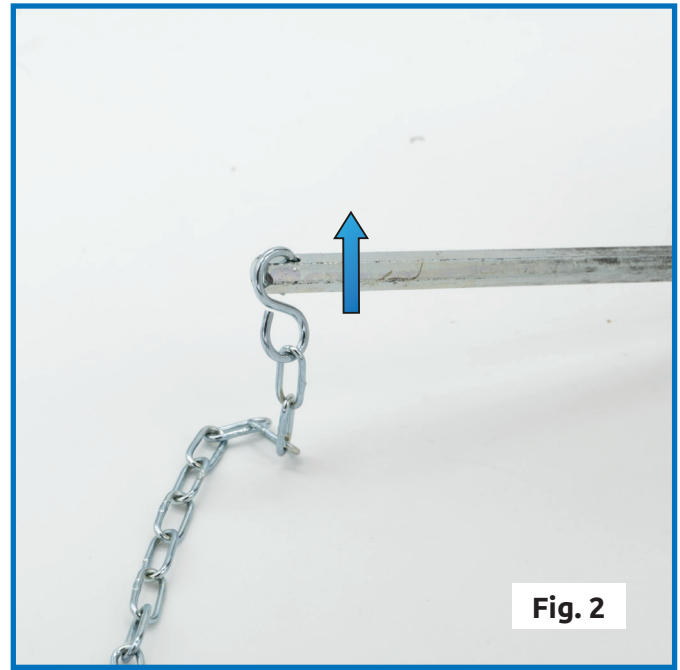


Replacement instructions of the draw regulator chain item 147

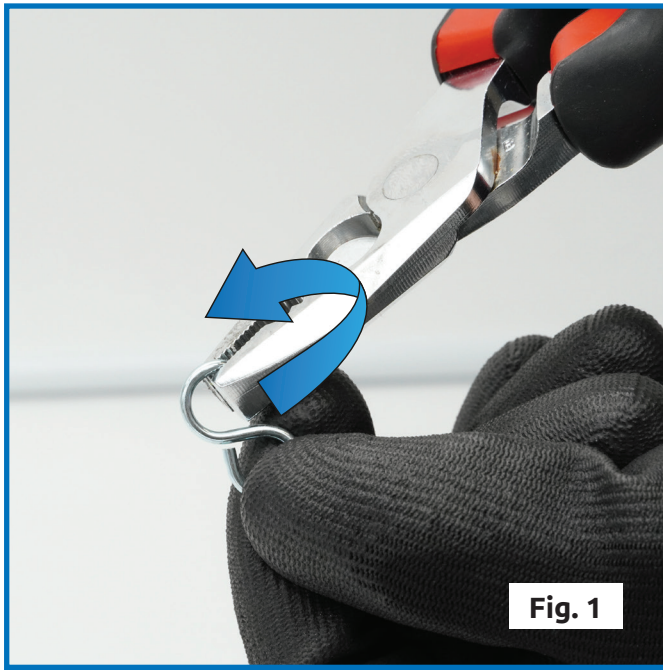

⚠ Important: always wear protective gloves during all operations.

1. Slightly bend the ring, as shown in fig. 1 in order to be able to remove the chain to be replaced from the rod hole.
2. Repeat the same operation on the replacement chain, slightly bending the ring to insert it into the rod hole.
3. Ensure that the ring is properly realigned and that there are no deformations after assembly.