
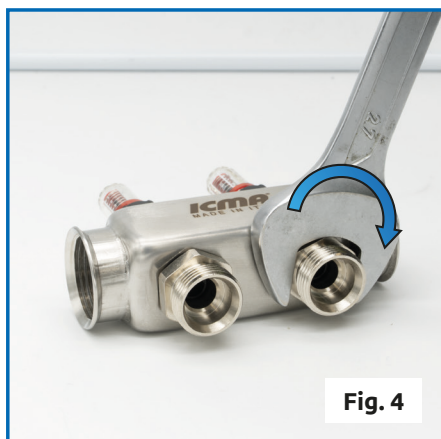


## Instructions for replacing the TACONOVA flow meter connector

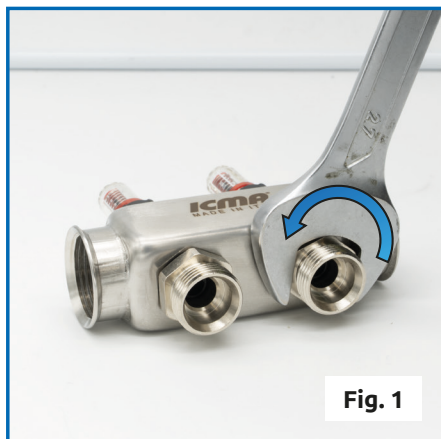

**The main pipe must be shut off if the operation is carried out whilst the main pipe is connected to a system**

**⚠ Important: always wear protective gloves during all operations.**

1. Using a **27 mm** spanner, remove the connectors as shown in **Fig. 1**, in order to replace them.