
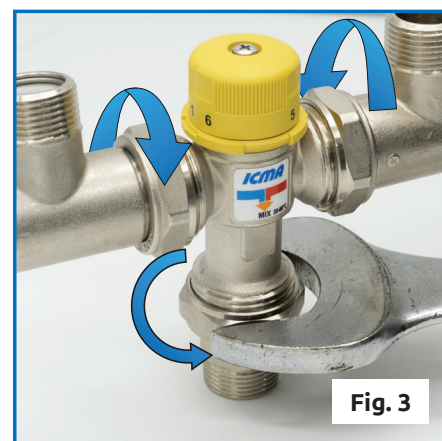
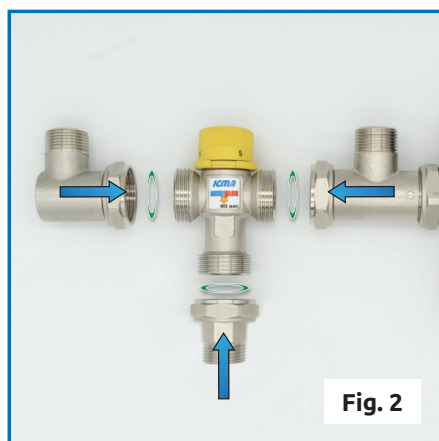


Replacement instructions of mixer and diverter of the solar integration kit item S170

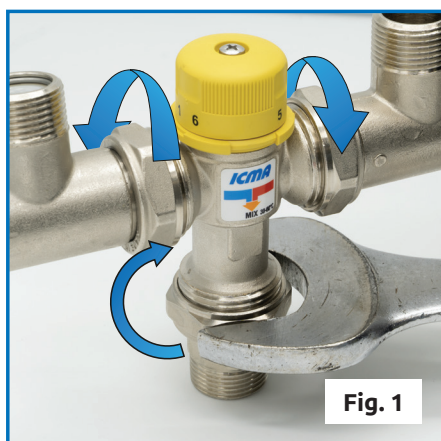

⚠ Important: always wear protective gloves during all operations.

1. Using a **37 mm wrench**, disassemble the three caps as shown in **fig. 1** to replace the mixer or diverter.
2. After replacing the component, reassemble all the elements following the instructions illustrated in **fig. 2** and **fig. 3**, making sure that the gasket is correctly inserted between the nozzle and the valve