

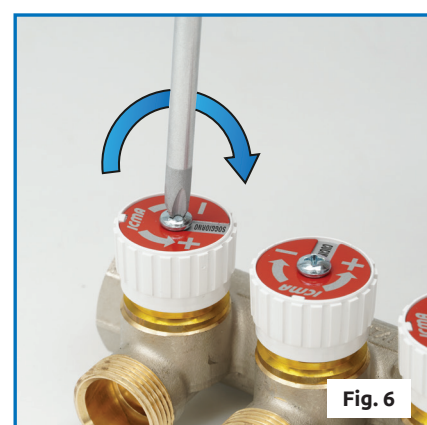
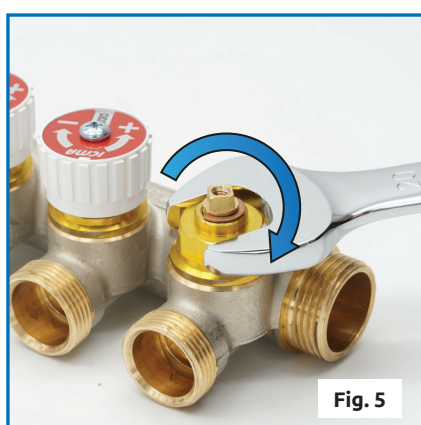
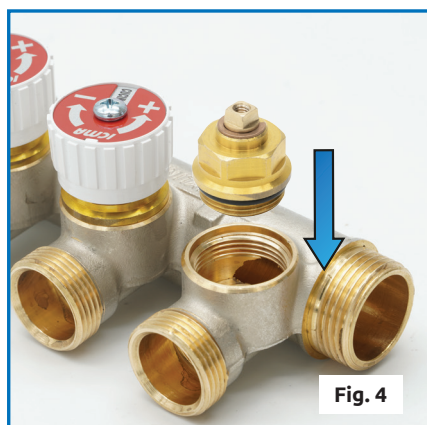
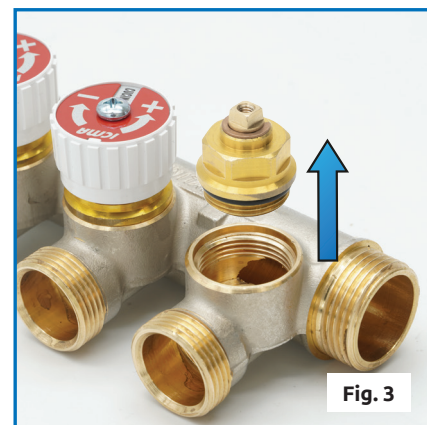


Item RSA227XX - RG0227PA01

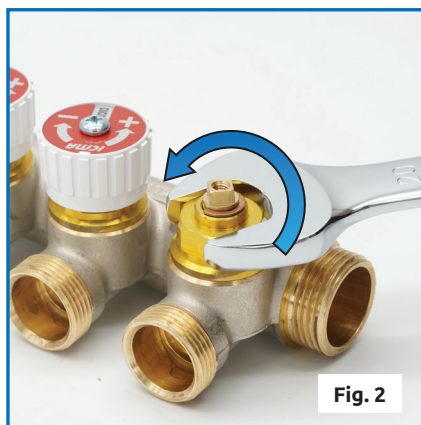

Replacement instructions of the handwheel+plate code kit RSA227XX and manual bolt RG0227PA01

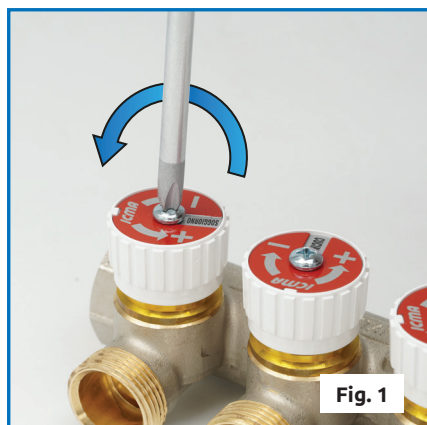

⚠ Important: always wear protective gloves during all operations.

1. **Unscrew the handwheel unit+plate to be replaced** using a cross head screwdriver (fig.1).
2. **Disassemble the screw to be replaced** with a 20 wrench (fig. 2/3).
3. **Fit the replacement screw** making sure the O-ring is sufficiently lubricated. If necessary, apply an EPDM-compatible lubricant, then carefully tighten the component (fig. 4/5).
4. **Screw back the handwheel unit+replacement plate** to complete the assembly (fig. 6).