
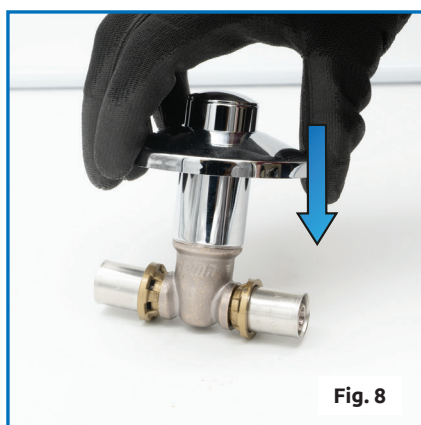
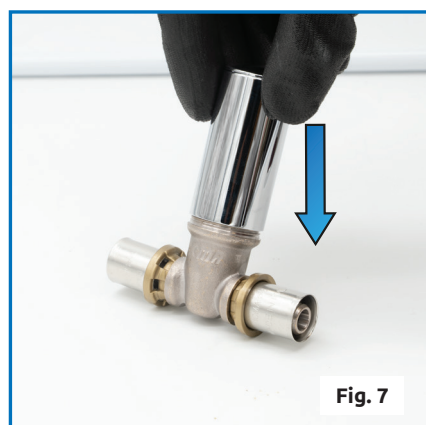
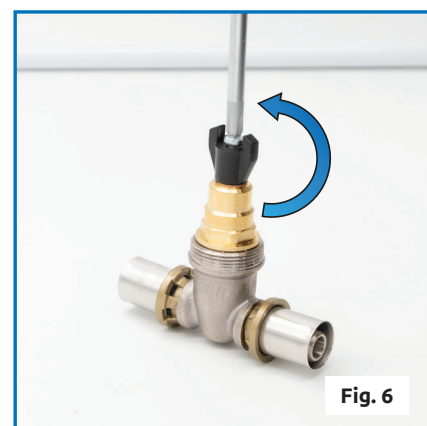
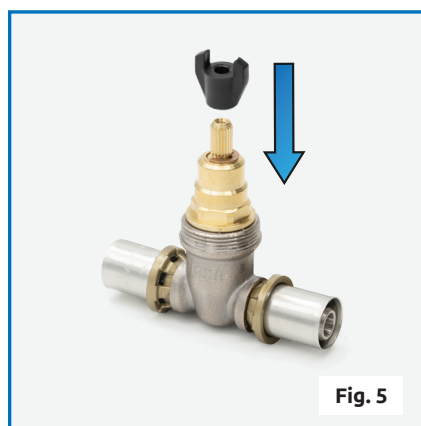
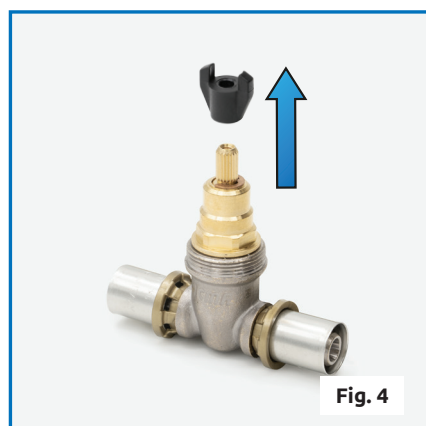
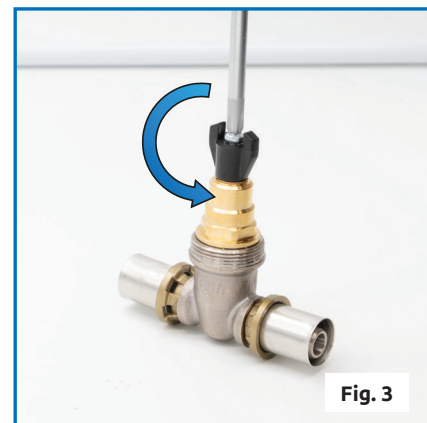
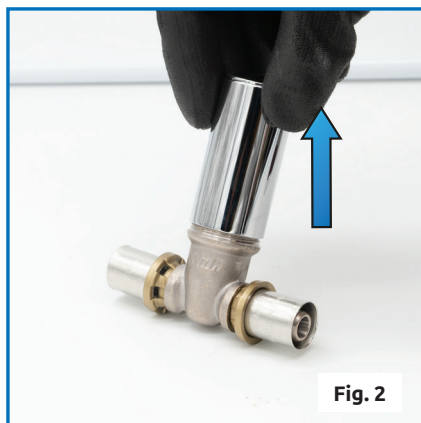


Instructions for replacing cap, rosette and butterfly handle for built-in cock

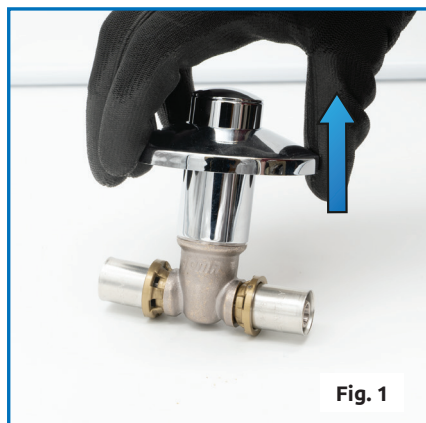

⚠ Important: always wear protective gloves during all operations.

1. Remove the cap and the rosette (fig. 1 and 2).
2. Unscrew the screw and remove the butterfly handle (fig. 3 and 4).
3. Replace and screw in the replacement butterfly handle (fig 5 and 6).
4. Refit the replacement rosette and cap (fig. 7 and 8).