

Compact thermoplastic manifold

TP01



ST.TP01.06.26.EN (NC 1674)

Description

The article TP01 is the Icma single molded manifold studied and produced for underfloor heating and cooling systems. The supply segment is equipped with a flow meter regulator valve.

By means of this regulator valve, every circuit flow rates can be regulated at the desired value with precision.

When necessary, this valve allows hermetic closing of single circuits. The return segment is equipped with built-in shut-off valves. Valves have been designed for application with electro-thermal control.

The manifold is full of a special inlet group including ball valve, thermometer and drain valve.

The manifold is easy to install in small spaces (box with 80 mm. depth) thanks to its extremely size.



Product line

Art.	Size	Outlets	Code
TP01	1"	2	87TP01PG05
TP01	1"	3	87TP01PH05
TP01	1"	4	87TP01PJ05
TP01	1"	5	87TP01PQ05
TP01	1"	6	87TP01PK05
TP01	1"	7	87TP01PR05
TP01	1"	8	87TP01PL05
TP01	1"	9	87TP01PS05
TP01	1"	10	87TP01PM05
TP01	1"	11	87TP01PT05
TP01	1"	12	87TP01PU05

Technical data

Max glycol percentage:	50%
Standard working pressure:	1,5 ÷ 2,5 bar
Max working pressure:	6 bar
Test pressure:	8 bar
Temperature range:	4 ÷ 70°C
Manifold connection:	1"F
Actuator connection:	M30x1,5 mm. only compatible with art. 977, art. 980 (normally open version).
Outlets connection:	3/4" M Euroconus
Centers distance:	45 mm.
Box depth:	80 mm.
Flowmeter range:	0 - 5 L/min

Main advantages

- Anti-condensation
- Resistant to chemical agent, UV raysozone, etc.
- Extremely low charge loss
- Instant visualization of the return cicuit flow and relative regulation


Compact thermoplastic manifold

TP01



ST.TP01.06.26.EN (NC 1674)

Components

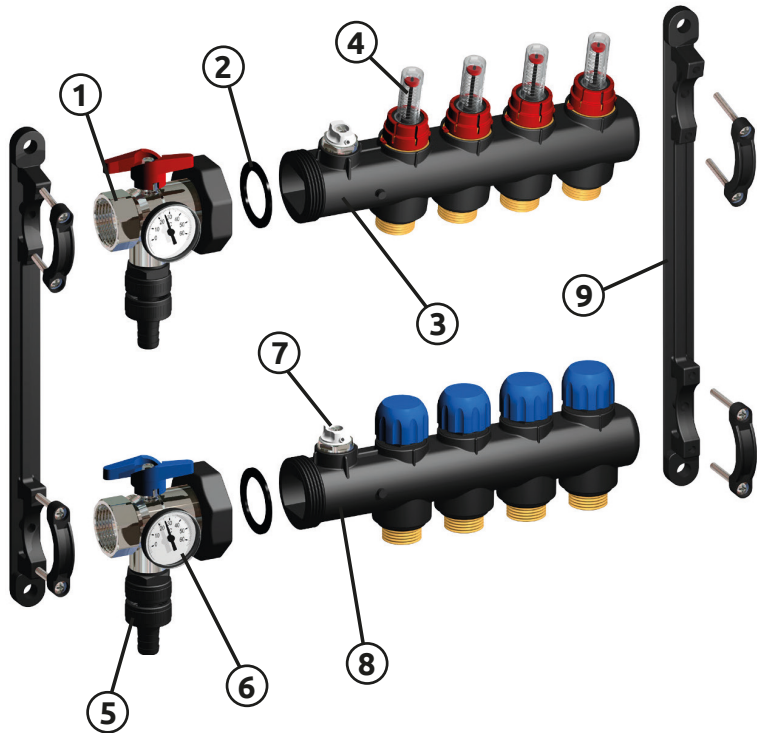


1. 1" Ball valve
2. Gasket
3. Supply segment
4. Flow meter
5. Drain valve
6. Thermometer
7. Air vent
8. Return segment
9. Bracket

*Previous models were fitted with a drain tap with a hose connector (see photo opposite).



Dimensions

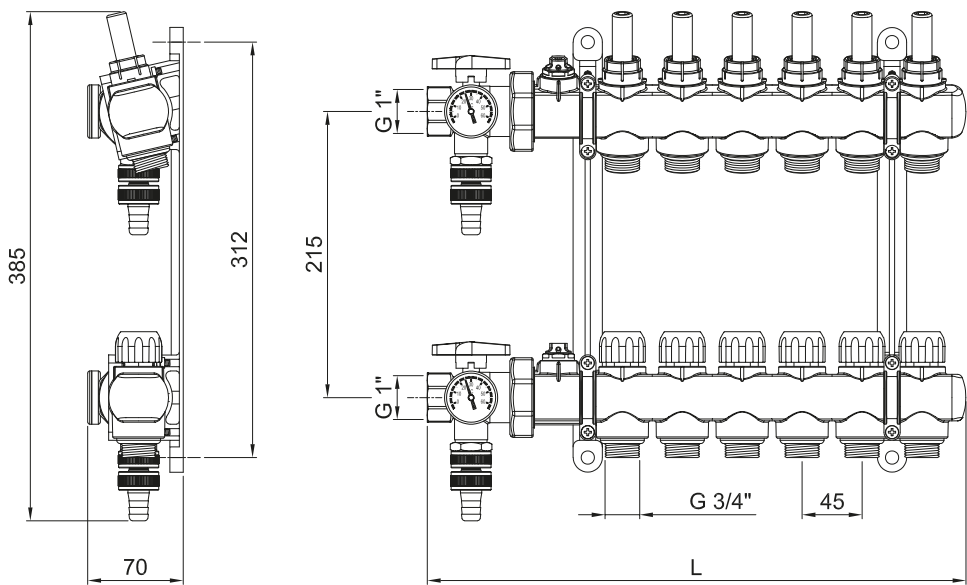

Outlets	L
2	225
3	270
4	315
5	360
6	405
7	450
8	495
9	540
10	585
11	630
12	675

Compact thermoplastic manifold TP01



ST.TP01.06.26.EN (NC 1674)

/ Spare parts




Flowmeter

Code	Size	Measuring range
RG1TP01AE06	1"	0-5 l/min

/ Pressure loss diagrams


CONNECTION DIAGRAM

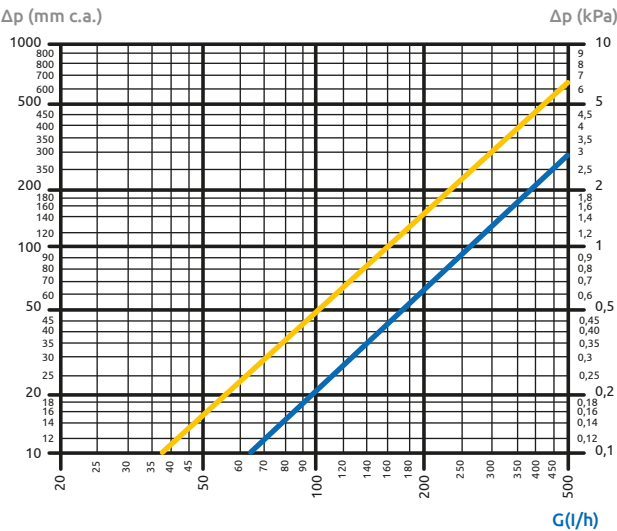

Kv = m³/h flow / 1 bar loss of charge

	Kv
● SUPPLY LOOP TOTALLY OPEN	1,8
● RETURN LOOP TOTALLY OPEN	2,6

MANIFOLD DIAGRAM

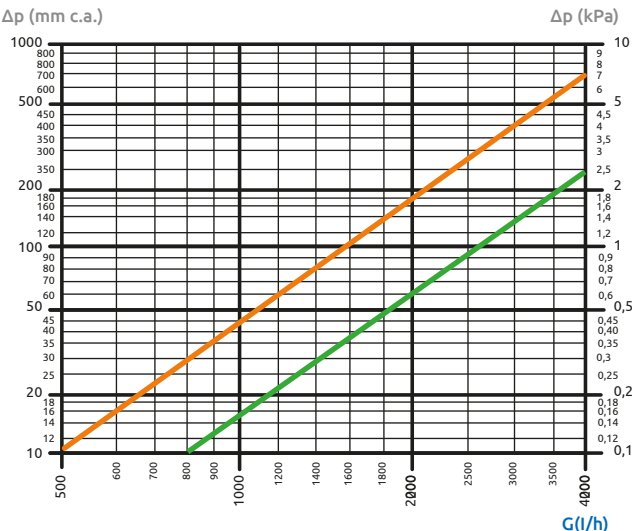

Kv = m³/h flow / 1 bar loss of charge

	Kv
● 3÷6 MANIFOLD LOOPS TOTALLY OPEN	18
● 7÷12 MANIFOLD LOOPS TOTALLY OPEN	14,5